

# PRODUCT CATALOGUE INSTRUMENT TRANSFORMER



## CT INDOOR

TCI-24-2E



CTB-24



TCI-24-2D



|                                  |  |
|----------------------------------|--|
| Highest System Voltage           | 24 kV  |
| Rated Primary Current            | 5 to 3200 A  |
| Rated Short-time Thermal Current | Up to 50kA/3s<br>[Depend on Rated Primary Current, Accuracy Class & Burden]                        |
| Accuracy Class                   | Measurement : 0.2S, 0.2, 0.5S, 0.5, 1, 0.5FS5, 0.5FS10<br>Protection : 10P10, 5P10, 5P15, 5P20, PX |
| Rated Burden                     | Up to 30 VA<br>Outputs higher than 40VA are available upon request                                 |

## RING CT

RCT-1L2



ZTA-1B



BCT Oil



|                        |   |
|------------------------|---|
| Highest System Voltage | 0.72 kV up to 1.2 kV  |
| Rated Primary Current  | 50 to 1250 A (BCT Oil up to 5000A)  |
| Accuracy Class         | Measurement: 0.2S, 0.2, 0.5S, 0.5, 1, 0.5FS5, 0.5FS10<br>Protection : 10P10, 5P10, 5P15, 5P20, PX |
| Rated Burden           | Up to 30 VA<br>Output higher than 40 VA available upon request                                    |

## VT INDOOR

VTB-24



VTI -24-2



VT-24A



VTI-24-4



VT-24F



VT-24-2B1S



|                        |  |
|------------------------|--|
| Highest System Voltage | 24 kV  |
| Rated Primary Current  | Up to $22.9/\sqrt{3}$ kV (22.9 kV for VT-24-2B1S/2S) |
| Rated Voltage Factor   | Up to 1.9 Un/8Hr                                     |
| Accuracy Class         | Measurement : 0,2 - 0,5 - 1,0<br>Protection : 3P; 6P |
| Rated Burden           | Up to 100 VA   |

## VT OUTDOOR

VT24 (0) 1B1S/2S



2VTO - 24



|                        |   |
|------------------------|---|
| Highest System Voltage | 24 kV   |
| Rated Primary Voltage  | up to 22.9 kV/√3 kV (22.9 kV for 2VTO-24)                       |
| Rated Voltage Factor   | Up to 1.9 Un/8Hr  |
| Accuracy Class         | Measurement : 0,2 - 0,5 - 1,0<br>Protection : 3P; 6P            |
| Rated Burden           | Up to 100 VA for VT24 (0) 1B1S/2S<br>Up to 500 VA for 2VTO - 24 |

## CT OUTDOOR

CT-24(0)-1C1R/1C2R/  
2C1R/2C2R



|                                   |   |
|-----------------------------------|---|
| Highest System Voltage            | 24 kV   |
| Rated Primary Current             | 10 to 600 A   |
| Rated Short Thermal Current (Ith) | Up to 25kA/1s<br>Depend on Rated Primary Current, Accuracy Class and Burden |
| Accuracy Class                    | 0.2S - 0.2 -<br>0.5S - 0.5<br>5P10; 5P20                                    |
| Rated Burden                      | up to 30 VA   |

## OTHER PRODUCTS

CTB-24-B2



TCI-24-4B



Dry Type



TCI-24-4C




VTB-12




VTB-24-2



RCT-1A3

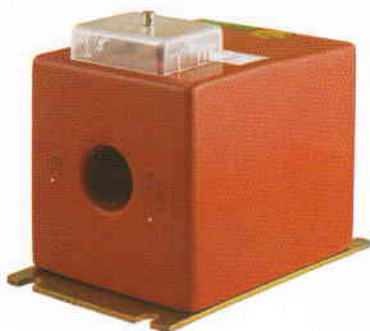

VTB-12F

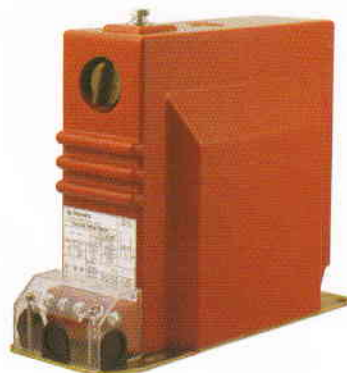

CTB-24-2A



**HEAD OFFICE**

**PT. TRAFIINDO PRIMA PERKASA**

Jl. Hayam Wuruk 4FX

Jakarta 10120, Indonesia

Phone: +62 21 385 0703, 345 1384

Fax: +62 21 385 0702, 386 1869

**FACTORY – TRANSFORMER**

Jl. Siliwangi Kel. Alam Jaya, Kec. Jatiuwung

Tangerang, Banten, Indonesia

Phone: +62 21 590 3801, 590 3802

Fax: +62 21 590 0616

For sales inquiries:

[marketing@trafoindonesia.com](mailto:marketing@trafoindonesia.com)

For transformer services:

[trafo@trafoindonesia.com](mailto:trafo@trafoindonesia.com)

Visit us [www.trafoindonesia.com](http://www.trafoindonesia.com)

**FACTORY – CTVT**

Jl. Siliwangi Kel. Alam Jaya, Kec. Jatiuwung

Tangerang, Banten, Indonesia

Phone: +62 21 5931 9002, 5931 9005

Fax: +62 21 5931 9001

For sales inquiries:

[sales.ctvt@trafoindonesia.com](mailto:sales.ctvt@trafoindonesia.com)