

Multifunction Transducer

MT440



**CLASS
0.5**

**RS²³²
485**


USB 2.0

- **Voltage and current auto range measurements up to 600V_±, 12.5A**
- **Universal wide auxiliary power supply range 24 – 300 Vdc, 40 – 276 Vac**
- **Power accuracy class 0.5 (EN 60 688),**
- **Up to four I/O modules (analogue out, pulse out, alarm out, general purpose digital out)**
- **Sophisticated analogue out; 2 voltage and 4 current ranges, non-linear characteristics ...**
- **Simple USB setting without auxiliary power supply**



PROPERTIES

- Measurements of instantaneous values of more than 50 quantities (V, A, kW, kVA, kvar, kWh, kvarh, PF, Hz, MD thermal, THD, etc)
- Power accuracy class 0.5
- 16 adjustable alarms
- Input frequency: 50/60 Hz, 400 Hz
- Serial communication (RS232 or RS485 up to 115,200 bit/s) and USB 2.0
- MODBUS RTU communication protocol
- Up to 4 I/O (analogue outputs, alarm outputs, pulse outputs, general purpose relay output, general purpose solid-state output)
- Single wide auxiliary power supply range 24 – 300 Vdc, 40 – 276 Vac or fixed AC: 110V, 230V, 400V
- Automatic range of current and voltage (max. 12.5 A and 600 V_{L-N})
- Housing for DIN rail mounting
- User-friendly setting software, MiQen

DESCRIPTION

MT440 are intended for measuring and monitoring single-phase or three-phase electrical power network. They measure RMS value by means of fast sampling of voltage and current signals, which makes instruments suitable for acquisition of transient events. A built-in microcontroller calculates measurands (voltage, current, frequency, energy, power, power factor, THD phase angles, etc.) from the measured signals



COMPLIANCE WITH STANDARDS:

Standard EN	Description
61010-1: 2001	Safety requirements for electrical equipment for measurement, control and laboratory use
60688:1995 / A2: 2001	Electrical measuring transducers for converting AC electrical variables into analogue and digital signals
61326-1:2006	EMC requirements for electrical equipment for measurement, control and laboratory use - Part 1: General requirements
60529:1997/A1:2000	Degrees of protection provided by enclosures (IP code)
60 068-2-1/ -2/ -6/ -27/-30	Environmental testing (-1 Cold, -2 Dry heat, -30 Damp heat, -6 Vibration, -27 Shock)
UL 94	Tests for flammability of plastic materials for parts in devices and appliances

APPLICATION

The MT440 multifunction transducer is used for measuring and monitoring of all single-phase or three-phase values. Wide range of various I/O modules makes MT440 a perfect choice for numerous applications. MT440 is delivered un-configured for customer configuration with user friendly setting software MiQen. MT440 supports standard serial communication RS232 or RS485 with speed up to 115200 baud, which is perfect for simple applications and serial bus interfacing.

Additional USB 2.0 interface can only be used for a fast set-up without need for auxiliary power supply. This interface is provided with only BASIC insulation and can be used ONLY unconnected to power inputs.

PROGRAMMING

MT440 multifunction transducer is completely programmable. It can be programmed using standard RS232/485 communication (if available) or USB communication (always present). For more information about connection and programming see *MT440 Users manual*.

Primary-secondary ratio (U, I), alarm limits, energy counter, input and output values are all programmed by setting software MIQen via RS232 or RS485 communication.

It is possible to choose between several standard output value ranges (- 100 ... 0 ... 100%):

- 10 ... 0 ... 10 V,
- 1 ... 0 ... 1 V,
- 20 ... 0 ... 20 mA,
- 10 ... 0 ... 10 mA,
- 5 ... 0 ... 5 mA,
- 1 ... 0 ... 1 mA,.

Within these six ranges it is possible to set any linear or bent (with maximum 5 break points) output characteristic.

TECHNICAL DATA

MEASUREMENT INPUT



Nominal frequency (f_N) 50/60, 400 Hz

Current measurements:

Nominal values 1, 5, 10 A
 Nominal current (I_N) 5 A
 Max. measured value 12.5 A sinusoidal
 Max. allowed value (thermal) 15 A cont.
 (acc. to EN 60 688) $20 \times I_N$; $5 \times 1s$
 Consumption $< I^2 \times 0.01\Omega$ per phase

Voltage measurements:

Nominal values 62.5, 125, 250, 500 V_{LN}
 Nominal voltage (U_N) 500 V_{LN}
 Max. measured value (cont.) 600 V_{LN} ; 1000 V_{LL}
 Max. allowed value $2 \times U_N$; 10 s
 (acc. to EN 60 688)
 Consumption $< U^2 / 3.3M\Omega$ per phase
 Input impedance 3.3M Ω per phase

Frequency measurement:

Frequency measuring range 16 ... 400 Hz (on comm.)
 (Only for frequency meas.) $f_N \pm 30Hz$ (on analogue out)

System:

Voltage inputs can be connected either directly to low-voltage network or via a high-voltage transformer to high-voltage network.

Current inputs can be connected either directly to low-voltage network or shall be connected to network via a corresponding current transformer (with standard 1 A or 5 A outputs).

For more information about different system connections see CONNECTION on page 6.

BASIC ACCURACY UNDER REFERENCE CONDITIONS

Total accuracy (measurements and analogue output) according to EN 60 688

Accuracy is presented as percentage of measurands nominal value except when it is stated as an absolute value. Presented accuracy is valid only for a full output range. In case if used output range is less than full output range (zoom-characteristics) see INTRINSIC ERROR on page 5. Defined accuracy of analogue output is valid only after 45 minutes after power up, due to self-heating.

Measurand	Accuracy (\pm % of range)	
Current Rms	0.3	0.2 ⁽¹⁾
Voltage Rms P-N and P-P	0.3	0.2 ⁽¹⁾
Power (P, Q, S)	0.5	0.3 ⁽¹⁾
Power factor (PF)	0.2°	
Frequency (f)	10 mHz	2 mHz ⁽¹⁾
P-N and P-P angle	0.2	
THD (U), THD (I) (0 ... 400 %)	0.5	
Active energy	Class 1	
Reactive energy	Class 2	

⁽¹⁾ On communication

COMMUNICATION

MT440 has one galvanically separated communication port, which can be equipped with RS232 or RS485 or left open (to be specified with order).

Different configurations are possible (to be specified with order):

Configuration	COM
WO	USB ⁽²⁾
RS232	RS232 + USB ⁽²⁾
RS485	RS485 + USB ⁽²⁾

⁽²⁾ Read WARNING!!

Serial communication:	RS232	RS485
Connection type	Direct	Network
Connection terminals	screw terminals	screw terminals
Function	Settings, measurements and firmware upgrade	
Insulation	Protection class II, 3.3 kV _{ACRMS} 1 min	
Max. connection length	3 m	1000 m
Transfer mode	Asynchronous	
Protocol	MODBUS RTU	
Transfer rate	2.4 kBaud to 115.2 kBaud	
Number of bus stations	/	≤ 32

Additionally, MT440 has a USB communication port, located on the bottom under small circular plastic cover. It is intended for settings ONLY and requires NO auxiliary power supply. When connected to this communication port MT440 is powered by USB.

WARNING:

USB communication port is provided with only BASIC insulation and can ONLY be used unconnected to aux. supply AND power inputs.

USB:

Connection type	Direct
Connection terminal	USB-mini
Max. connection length	3 m
Function	Settings, firmware upgrade
Transfer mode	Asynchronous
Protocol	MODBUS RTU
Transfer rate	USB 2.0

The USB cover should not remain open. It should be closed immediately after the initial setting through USB port was done and should remain closed during all time of storing & operation. If unit operates without USB cover the warranty is void.

INPUT / OUTPUT MODULES

MT440 can be equipped with up to four modules⁽¹⁾. The following modules are available:

Analogue output	up to 4	any I/O
Fast analogue output	up to 4	any I/O
Electromechanical relay output	up to 4	any I/O
Solid-state relay output	up to 4	any I/O

Electromechanical or solid-state relay output can be used as:

- Alarm output
- Pulse output
- General purpose digital output

Analogue output:

Each of up to four analogue outputs is fully programmable and can be set to any of 6 full-scale ranges (4 current and 2 voltage) without opening an instrument. They all use the same output terminals. It is possible to set other sub-ranges (e.g. 4 ... 20 mA) by setting breakpoints.

FAST analogue output has the same functionality as standard analogue output with faster response time.

Programmable DC current output:

Output range values	-100 ... 0 ... 100%
-1 ... 0 ... 1 mA	Range 1
-5 ... 0 ... 5 mA	Range 2
-10 ... 0 ... 10 mA	Range 3
-20 ... 0 ... 20 mA	Range 4

Max. burden voltage

10 V

External resistance

$R_{Bmax} = 10 \text{ V} / I_{outN}$

Programmable DC voltage output:

Output range values	-100 ... 0 ... 100%
-1 ... 0 ... 1 V	Range 5
-10 ... 0 ... 10 V	Range 6

Max. burden current	20 mA
External resistance	$R_{Bmin} = U_{outN} / 20 \text{ mA}$

General:

Max. voltage on output (open circuit current output)	35 V
Max. current on output (short circuit voltage output)	35 mA
Linearization	Linear, Quadratic
No. of break points	5
Output value limits	$\pm 120\%$ of nominal output
Response time ⁽¹⁾ (measurement and analogue output)	< 100 ms
Response time of fast ⁽¹⁾ analogue output	$\leq 50 \text{ ms}$
Residual ripple	< 1 % p.p.
Residual ripple of fast analogue output	< 2 % p.p.

⁽¹⁾ Response time for frequency is:

Typical	300 ms
Max. (freq. change > 10Hz)	3000 ms

All outputs may be either short or open-circuited. They are electrically insulated from each other (500 VAC_{rms}) and from all other circuits (3320 VAC_{rms}).

All output range values can be altered subsequently (zoom scale) using the setting software, but a supplementary error results (see INTRINSIC ERROR on page 6).

Electromechanical Relay output:

Purpose	alarm, pulse, general purpose digital output
Type	Electromechanical Relay switch
Rated voltage	48 V AC/DC (+40% max)
Max. switching current	1000 mA
Contact resistance	$\leq 100 \text{ m}\Omega$ (100 mA, 24V)
Pulse (if used as pulse output)	Max. 4000 imp/hour Min. length 100 ms
Insulation voltage	
Between coil and contact	4000 VDC
Between contacts	1000 VDC

Solid-state relay output

Purpose	alarm, pulse, general purpose digital output
Type	Optocoupler open collector switch
Rated voltage	40 V AC/DC
Max. switching current	30 mA ($R_{ONmax} = 8\Omega$)
Pulse length (if used as pulse output)	programmable (2 ... 999 ms)

AUX POWER SUPPLY

Universal supply	
Nominal voltage AC range	40 ... 276 V
Nominal frequency range	45 ... 65 Hz
Nominal voltage DC range	24 ... 300 V
Consumption	< 8VA
Power-on transient current	< 20 A; 3 ms
AC supply	
Nominal voltage AC	110 V, 230V, 400V
Nominal frequency range	45 ... 65 Hz
Consumption	< 5VA

SAFETY:

Protection:	protection class II
Pollution degree	2
Installation category	CAT III; 600 V _⊥ meas. inputs CAT III; 300 V _⊥ aux. uni.supply CAT III; 600 V _⊥ aux. AC supply Acc. to EN 61010-1
Test voltages	$U_{AUX} \leftrightarrow I/O, COM: 3320 \text{ VAC}_{rms}$ $U_{AUX} \leftrightarrow U, I \text{ inputs}: 3320 \text{ VAC}_{rms}$ $U, I \text{ in} \leftrightarrow I/O, COM: 3320 \text{ VAC}_{rms}$ $U \text{ in} \leftrightarrow I \text{ in}: 3320 \text{ VAC}_{rms}$
Enclosure material	PC/ABS Acc. to UL 94 V-0

¹ With fixed AC power supply only a single analogue or fast analogue module is available

MECHANICAL

Dimensions	W100 × H75× D105 mm
Max. conductor cross section for terminals	2,5 mm ² with pin terminal 4 mm ² solid wire
Vibration withstand	7g, 3 ... 100 Hz, 1 oct/min 10 cycles in each of three axes
Shock withstand	300g, 8ms pulse 6 shocks in each of three axes
Mounting	Rail mounting 35 × 15 mm acc. to DIN EN 50 022
Enclosure material	PC/ABS
Flammability	Acc. to UL 94 V-0
Weight	370 g
Enclosure protection	IP 20

ENVIRONMENTAL CONDITIONS:

Ambient temperature	usage group III - 10 ... 0...45 ... 55 °C Acc. to IEC/EN 60 688
Operating temperature	- 30 to + 70 °C
Storage temperature	- 40 to +70 °C
Average annual humidity	≤ 93% r.h.
Altitude	≤ 2000 m

INTRINSIC-ERROR (FOR ANALOGUE OUTPUTS):

For intrinsic-error for analogue outputs with bent or linear-zoom characteristic multiply accuracy class with correction factor (c). Correction factor c (the highest value applies):

Linear characteristic


$$c = \frac{1 - \frac{y_0}{y_e}}{1 - \frac{x_0}{x_e}} \quad \text{or} \quad c = 1$$

Bent characteristic

$$x_{b-1} \leq x \leq x_b$$

b – number of break point (1 to 5)

$$c = \frac{y_b - y_{b-1}}{x_b - x_{b-1}} \cdot \frac{x_e}{y_e} \quad \text{or} \quad c = 1$$

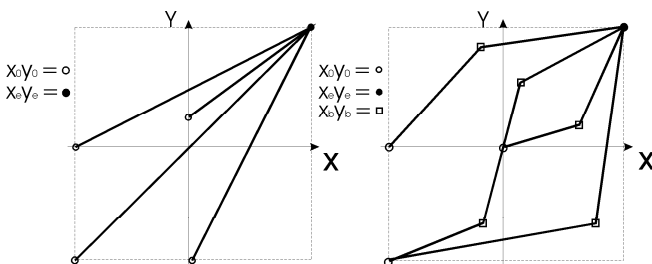

--- Limit of the output range


Examples of settings with linear and bent characteristic

ALARMS

MT440 supports setting up to 16 alarms in two alarm groups. Alarms can be set for any of measured parameters by setting condition and a limit value. A time constant of maximum demand values in a thermal mode, a delay time and switch-off hysteresis are defined for each group of alarms. To each of two alarm groups an alarm output (solid-state or electromechanical relay) can be dedicated.

MiQen - setting and acquisition Software

MiQen software is intended for supervision of MT440 and many other instruments on a PC. Network and the transducer setting, display of measured values are possible via the serial communication. The information and measurements can be exported in standard Windows formats. Multilingual software functions on Windows 98, 2000, NT, XP, Vista, Windows 7 operating systems.

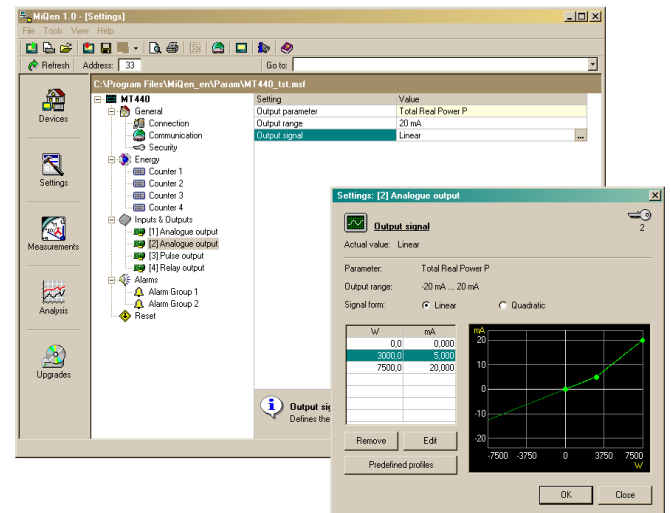

MiQen software is intended for:


- Setting all of the instruments parameters (online and offline)
- Viewing current measured readings
- Setting and resetting energy counters
- Complete I/O modules configuration
- Searching the net for devices
- Virtual interactive instrument
- Comprehensive help support

CONNECTION

System/ connection	Terminal assignment
Single-phase connection 1b (1W)	
Three-phase three-wire connection with balanced load 3b (1W3)	
Three-phase three-wire connection with unbalanced load 3u (2W3)	

System/ connection	Terminal assignment
Three-phase four wire connection with balanced load 4b (1W4)	
Three-phase four wire connection with unbalanced load 4u (3W4)	

DIMENSIONAL DRAWING

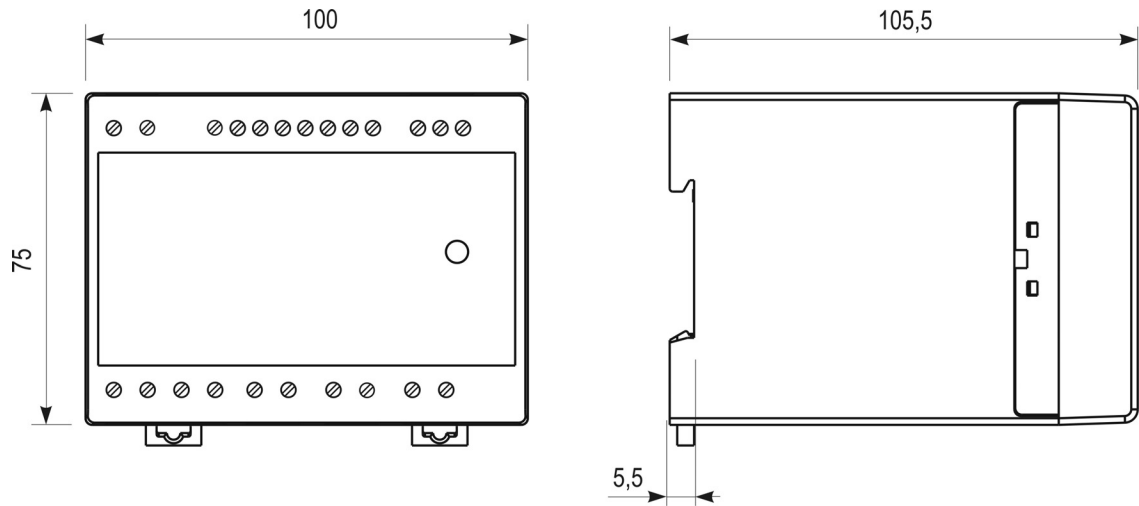

Dimensions for MT440.

CONNECTION TABLE

Function		Connection	
Measuring input:	AC current	IL1	1/3
		IL2	4/6
		IL3	7/9
	AC voltage	UL1	2
		UL2	5
		UL3	8
		N	11
		I/O	
Inputs / outputs:	I/O 1	⊕ +	15
		⊖ -	16
	I/O 2	⊕ +	17
		⊖ -	18
	I/O 3	⊕ +	19
		⊖ -	20
	I/O 4	⊕ +	21
		⊖ -	22
Auxiliary power supply:		+ / AC (L)	13
		- / AC (N)	14
Communication:	RS232 / RS485	Rx / A	23
		GND / NC	24
		Tx / B	25

DATA FOR ORDERING

The following data shall be stated:

Type of transducer
Input frequency
Type of communication
Type of I/O module(s)

Supplement:

MiQen software

ORDERING

When ordering MT440, all required specifications should be stated in compliance with the ordering code. Additional information could be stated regarding functionality of analogue outputs. Default settings for analogue outputs provided that no ordering information is given will be:

Analogue output	Input quantity	Output quantity
AO1	P (-7500...0...7500)W	-20...0...20 mA
AO2	Q (-7500...0...7500)var	-20...0...20 mA
AO3	U1 (0...500V)	0 ... 20 mA
AO4	I1 (0...5A)	0 ... 20 mA

If different analogue output settings are required, a proper input quantity / output quantity pair for each analogue output should be provided.

The transducers automatic range of input current (5 A) and voltage (500 V_{L-N}) is not stated in the code.

EXAMPLE OF ORDERING:

MT440 transducer with uni. power supply is connected to a secondary phase voltage (50 Hz) up to 500 V_{L-N} and 5 A secondary current. RS 232 communication, two analogue outputs, one electromechanical relay alarm output and one solid-state pulse output are applied.

Ordering code:

MT440 – 1 1 1 1 1 4 3

GENERAL ORDERING CODE

All specifications are obligatory except function of analogue output(s), which should be stated in a form of description.

1. Transducer type:

MT440

2. Aux. power supply

1	Universal
2	AC: 110V
3	AC: 230V
4	AC: 400V

3. Input frequency

1	50/60 Hz
2	400 Hz

4. Communication type (COM)

0	Without
1	RS232
2	RS485

5. I/O 1

0	Without
1	Analogue output
2	Fast analogue output
3	Solid-state relay output
4	Electromechanical relay output

6. I/O 2

0	Without
1	Analogue output
2	Fast analogue output
3	Solid-state relay output
4	Electromechanical relay output

7. I/O 3

0	Without
1	Analogue output
2	Fast analogue output
3	Solid-state relay output
4	Electromechanical relay output

8. I/O 4

0	Without
1	Analogue output
2	Fast analogue output
3	Solid-state relay output
4	Electromechanical relay output



Iskra Sistemi, d.d.
Stegne 21, SI-1000 Ljubljana, Slovenia
Phone: +386 1 513 10 00, Fax: +386 1 511 15 32
E-mail: info@iskrasistemi.si, www.iskrasistemi.si

